


# **August Smart Lock Pro**

## Installation Guide

## Inside the Box



August Smart Lock Pro



Mounting Plate



3 Adapters



Adhesive Strip

## What you need



Phillips Screwdriver



Before starting, we recommend confirming your deadbolt at [august.com/compatibility](https://www.august.com/compatibility)


# 1. Prepare your existing deadbolt

Use the supplied adhesive strip to hold the keyed side of the lock in place.



# 2. Remove your existing thumbturn

Unscrew and remove the screws from your existing deadbolt thumbturn. If there is an additional back plate, remove that as well. Be sure to unlock your deadbolt before removing the thumbturn entirely.

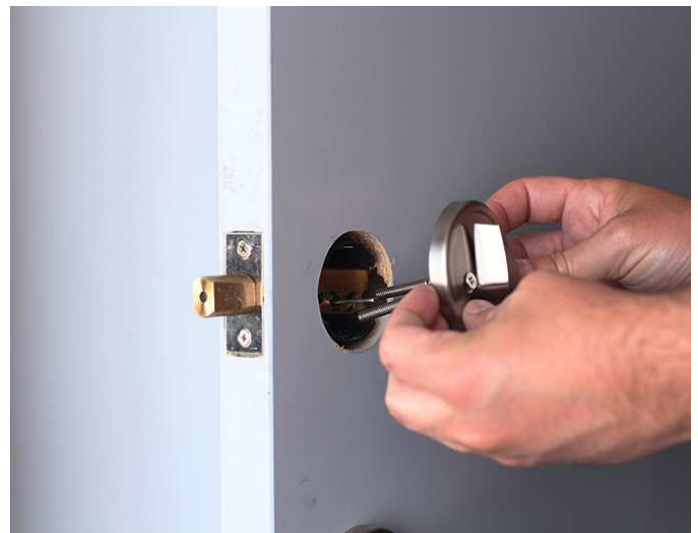

### 3. Prepare the mounting plate

The included mounting plate has two adjustable screw-holes that can be repositioned as needed. Remove the screws from the thumbturn and insert them into the front of the mounting plate.












### 4. Attach the mounting plate


Tighten the screws by hand until the mounting plate is secured against the door.




## 5. Choose your adapter

BRAND	ADAPTER
Baldwin - Estate/Images*	
Baldwin Reserve/Prestige	
Defiant	
Emtek	
Kwikset*	
Omnia**	
Schlage***	
Weiser	
Weslock	

\* Baldwin and Kwikset Deadbolts installed before 1997 have unique installation requirements, please contact us at 844-AUGUST1 (284-8781) and we will walk you through installation.  
\*\* Compatible only with non-mortise, standard Omnia deadbolts.  
\*\*\* Commercial grade Schlage B560 deadbolts require supplemental screws. If your Schlage screws are too short please contact us at support@august.com

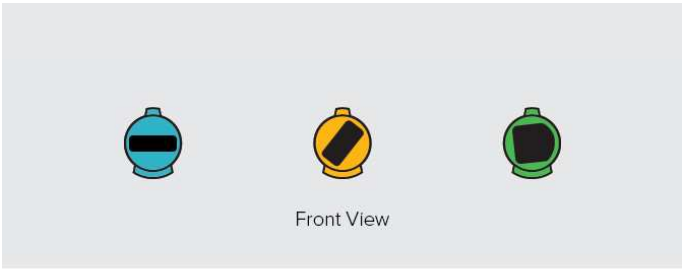

Front View

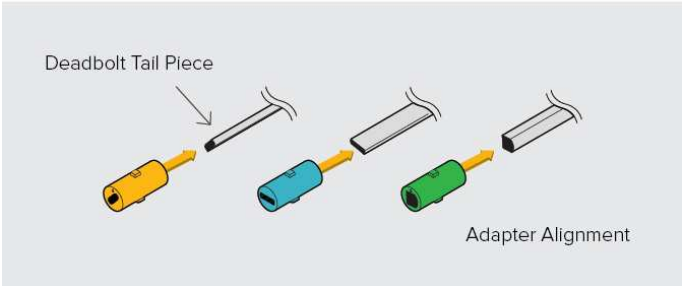

Deadbolt Tail Piece

Adapter Alignment

Select your adapter from the Compatibility Chart above.

If your lock brand is not in the chart, slide each adapter onto the tailpiece to find the right one. The correct adapter will have the small nub pointing up.

NOTE: The adapters can be placed in the mounting plate backwards. So if the shape is correct, but it seems backwards, try flipping the adapter around.

## 6. Attach the correct adapter

Place the correct adapter onto the tail piece with the small nub pointing up.




## 7. Open the wing latches

Pull out both side wing latches to prepare for mounting.



## 8. Attach the August Smart Lock Pro

Slide the August Smart Lock Pro over the tailpiece and attach it to the mounting plate. Make sure the back of the lock is flush with the door. To secure the August Smart Lock Pro, clamp down both side wing latches to the mounting plate completely.

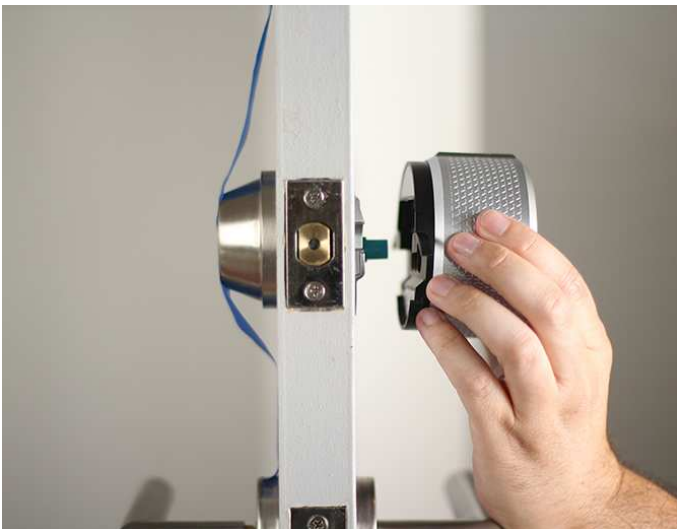

## 9. Remove the faceplate

Press down on the August logo located at the bottom of the face plate. Grab the top of the faceplate and remove it.



## 10. Remove the battery tab

While holding the batteries in place, remove the plastic battery isolation tab. Make sure that the battery is properly seated in its compartment.



## 11. Replace the faceplate

Place the faceplate back onto the August Smart Lock Pro, with the August logo at the bottom.



## 12. Install DoorSense™

DoorSense™ enables your lock to know when the door is open and closed. For instructions on installing DoorSense™, please visit the link below:

<http://support.august.com/customer/portal/articles/2875699>



## 13. Use the August Home app to complete setup

Download and install the August Home app. Select "Get Started" from the home screen, or, if already logged in to the app, select "Set Up a Lock" from the main menu.



<http://august.com/app>

## Help

Call 844-AUGUST1 (284-8781)  
or visit: [august.com/support](http://august.com/support) for answers.

