


Notes Before Installation


1. Wi-Fi Only support a 2.4GHz network (802.11 b/g/n) 2. Neutral wire Required.

 $3. Basic\, electrical\, wiring\, knowledge\, or\, experience\, required\, ,\, or\, please\, consult$ a professional electrician

4. Do not access more than the maximum power of the device design5.ON/OFF Button also can be used as reset button, long press to reset your smart socket to factory defaults. Only do this if you are sure you want to erase all your settings

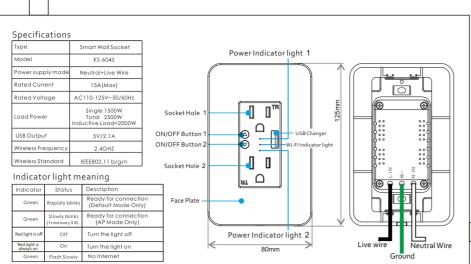

Safety Notice: ·Cut off the power before installation • Please use it only when it's installed with RCD or current leakage protector at home

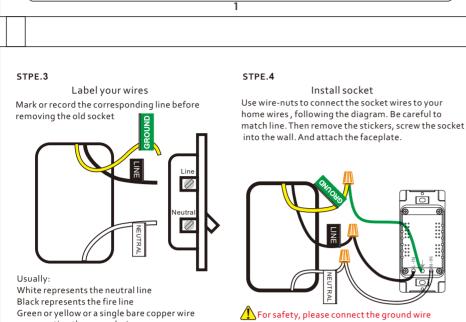



The above is for reference only and cannot be used as a standard,

representing the ground wire


Step A . Find out "Smart Life" app in Apple app store, Step C: Add the switch to Smart Life APP




The free app"Smart Life" is compatible with mobile devices the support IOS8.0 above, Android 4.4 above

Step B .Enter the register interface, input the email address/phone number for getting the verification code to register an account. Please just login if you already have a Smart Life account.



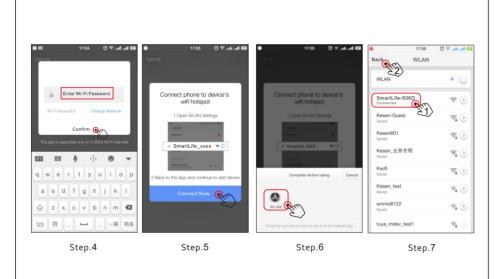

Try timer function to easily set up schedule to turn After completing Part Two. you can control the socket with Smart Life APP on this setting page now. on/off smart socket. Note:

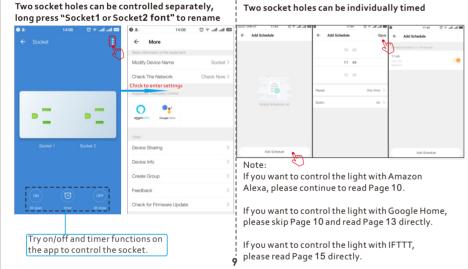

Step .C: Enter your account and password of Step .D: Once your Smart Life account is successfully "Smart Life"app, tap "Link now".then tap "Authorize" bound to Alexa, the following page will pop up. Tap on the next page to bind Smart Life account to Alexa


Same account and password as Smart Life App

O

note:



11

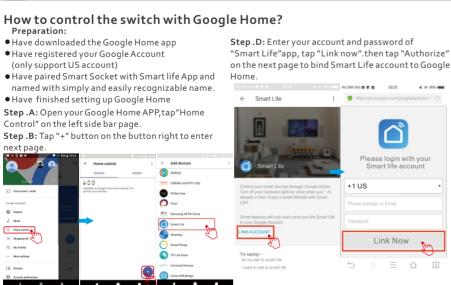

Step .C: Find "Smart Life" from the side bar list

How to control the switch with IFTTT? Step . A: Visit the IFTTT official website on your PC and sign in with your IFTTT account. Note: You can also use IFTTT app and follow similar

steps to connect your device to the IFTTT. In this FAQ the configuration. we take the website setting method for example.

Step .B:"Search"for "Smart Life", and then dick "Smart Life" service. Step . C: Click "Connect", then login your Smart Life





Step .D: Successfully connect your IFTTT account to your Smart Life ID. You are ready to enjoy the IFTTT service of the product now.

adding, device cam be control via mobile network.

Two methods to add device:" Default Mode" and "AP Mode"."Default Mode" is set up as default and

2. Please check if there is a neutral line in the cassette

3. Please check if the connected load exceeds the

Why can't I control the load after installing

1. Please check if the wiring is correct.

(neutral line is required)

maximum value of the device

How to share my device with family? Open App, enter into "shared device", tap "add sharing" to share device with family.

How to add device?

the product?


can switch to "AP Mode"

Instructions: 2 methods to use IFTTT with the product.

Method 1: On Smart Life service page, choose an $existing\,Applet\,you\,need,\,turn\,on\,it\,and\,then\,finish$ Method 2: Create a new Applet on your own.

Click My Applets" at the top and then click "New Applet" at the right top corner of the webpage to create a new Applet.

Step .A: Create a Trigger. Tap"this" to choose a Trigger. You can search for



We select "Sunset" as the Trigger.

FCC NOTE:
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: 10. If router enables MAC address filter, please try $removing \ the \ device \ form \ MAC \ filter \ list \ and \ make$ sure router is allowing device to be connected. (a) this device may not cause harmful interference, (a) this device must accept any interference received, including interference that may cause undesired operation. The manufacturer is not responsible for any radio or tv interference caused by Control device under 2G/3G/4G network? Device and smart phone must be in the same Wi-Fi $environment\ when\ adding\ device.\ After\ successful$


17

unauthorized modifications or change to this equipment. Such modifications or change could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is


encouraged to try to correct the interference by one or more of the following measures: -- Reorient or relocate the receiving antenna.


Increase the separation between the equipment and receiver.
 Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 Consult the dealer or an experienced radio/TV technician for help.


RF warning statement: To maintain compliance with FCC's RF exposure guidelines, this equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body. **Smart Home**

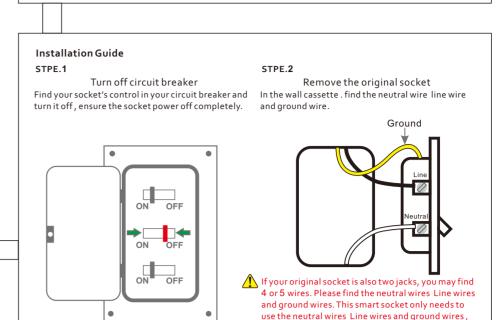



other lines do not need to be connected

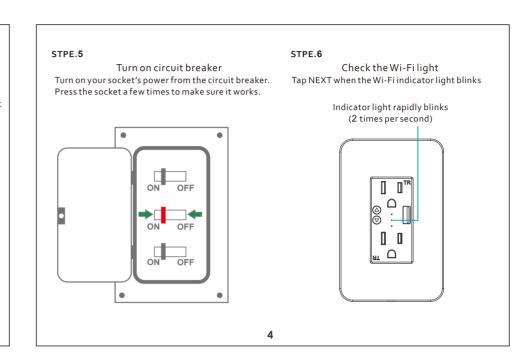

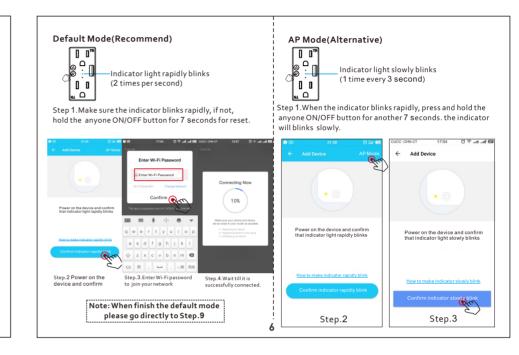

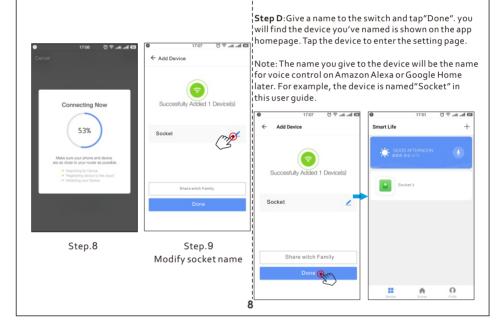

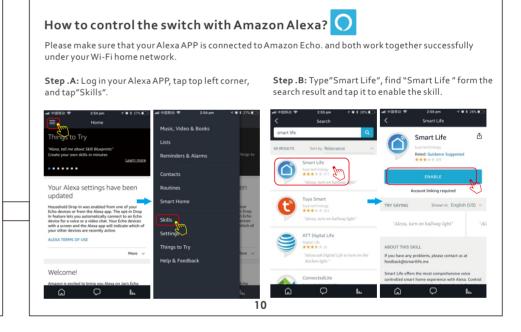

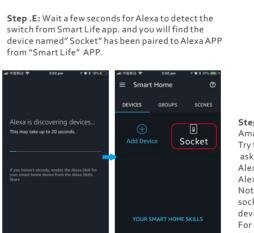


After Step E is done, you can now control the switch with Alexa app on this setting page

Tap to turn ON/OFF the socket Step .F: Now you are able to control the socket via Amazon Alexa. Try these commands and see what happens by asking Alexa: Alexa, turn on "device name"

Alexa, turn off "device name" Note: The device name is the one you give to the socket on "Smart Life" App . In this user guide, the device is named" Socket 1". For example: "Alexa, turn on Socket 1", "Alexa, turn off Socket 1" etc.

If you also want to control the socket with Google home, you can continue to read next page.

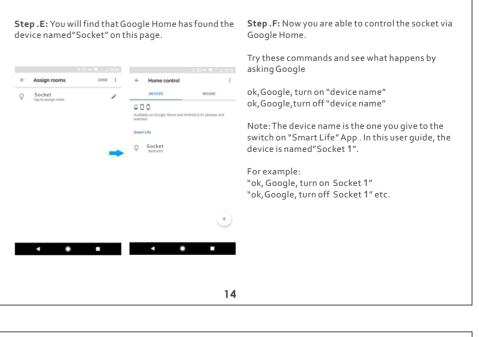

Step.B: Create an Action. Tap"this" to choose a Trigger. You can search for " Smart Life" to choose a Smart Life Action. Turn on This action will turn on the device/group of your choosing.

Which device/group? Socket Create action

Please note when adding device:

2. Confirm device is waiting for network

3. Confirm that device, smart phone and router are as close to each other. 4. Make sure the network function of router and

smart phone are unblocked. $5. Confirm \, the \, entered \, router \, password \, is \, correct.$

6. Confirm adding device is under 2.4G Wi-Fi

channel. Enable the broad case and not allow to hide Wi-Fi. ${\it 7.} Confirm\, that\, router's\, encryption\, method\, is$

WPA2-PSK and authentication type is AES, or both are set up as automatic.

 $\textbf{Step.C:} \ New \ Applet'' if sunset, then turn on light switch'' 8. Confirm that \ Wi-Finame contains letters only.$

Note: The Smart Life service can only works when create 9. If router's connected device reach the amount limit. Please try to turn off some devices Wi-Fi function and configure again.

We select "Turn on" of Socket as the Action in this case is created as a result. an action. You can't use the "Smart Life" as a Trigger.